








OPERATOR'S MANUAL

PGX™ COMMERCIAL CHARGING E-TRACK MOUNTING KIT

MODEL NUMBER AEK1000

This mounting kit is designed to be used with EGO PGX™ Commercial Charging 1600W Hub PGX1600E-H and PGX™ Commercial Charging 3-port Dock PGX3000D.



Packing List

PART NAME	FIGURE	QUANTITY
E-track Clip		2
Rubber Bumper		2
T25 Torx Key		1
M5 55 mm Long Bolt and Washer Set (for use with PGX™ Commercial Charging 1600W Hub)		2
M5 40mm Short Bolt and Washer Set (for use with PGX™ Commercial Charging 3-port Dock)		2

Mounting PGX1600E-H or PGX3000D onto E-track Rail (Fig. 1a, 1b)

NOTE: The E-track Rail is not included in the kit.

1. Disconnect the hub from the power supply, disconnect the dock from the hub, and remove all battery packs.
2. Remove the 2 rubber blocks on the hub/dock.

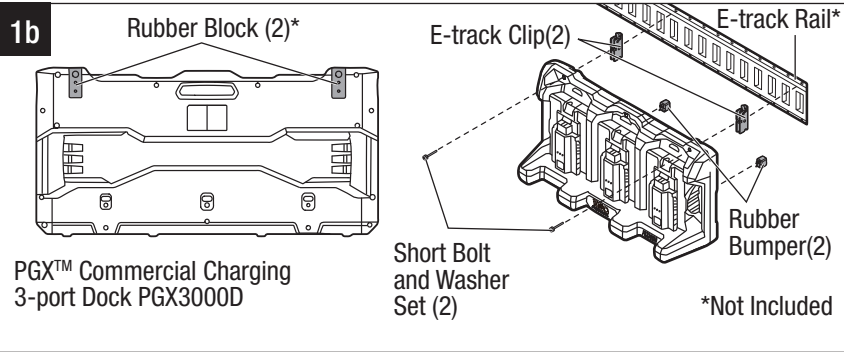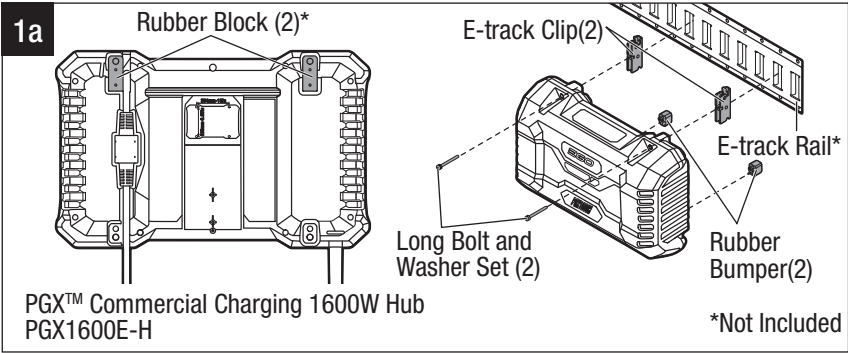

3. Install the E-track clips into the recessed areas (vacated by the rubber blocks) as shown.
4. Use the included torx key to secure each E-track clip to the PGX1600E-H commercial charging hub using the long, 55 mm bolt and washer sets. When mounting the PGX3000D commercial charging dock, use the short, 40mm bolt and washer sets as fasteners.
5. Insert two rubber bumpers into the outer lower slots on the back of the hub/dock.
6. Snap the hub/dock to the E-track rail using the E-track clips as shown and make sure the hub/dock is secured to the rail.
7. To remove the hub/dock from the E-track rail, press the release levers on the E-track clips and pull the hub/dock away.

NOTE: The hole in the E-track clip can function as an anti-theft device using a padlock (not included). The shackle diameter range is 5 – 7 mm.